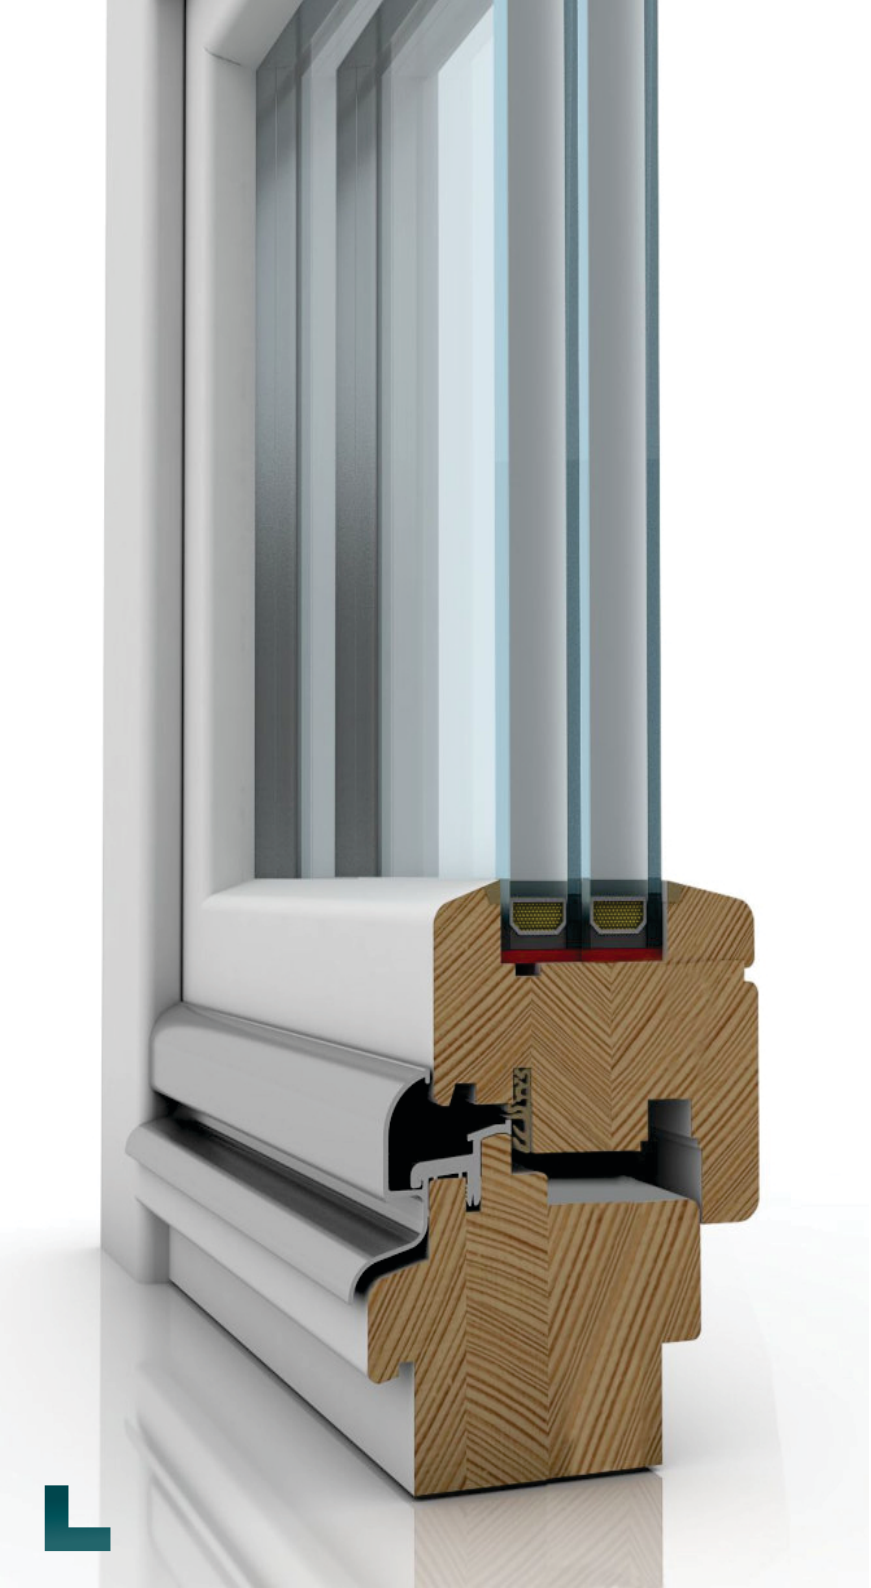


Q4 Sash Windows

# Inward Opening

## IV 78

### Tilt & turn operation

secure ventilation
and easy cleaning
from inside.

### Three performance levels

IV68, IV78 and Iv92 profiles,
up to passive house standard.

### Internal glazing beads

deep mouldings,
slim meeting rails,
true or applied glazing bars.

### Triple glazing ready

whole-window U-values
down to 0.74 W/(m²·K).

| | |
|---|---|
| Glazing unit: | **4-44 mm** |
| Pane: | **Ug = 3.0–0.5 W/(m²·K)** |
| Spacer: | **WARM** |
| Material: | **PINE JOINTED / MERANTI / OAK / SAPELE / ACCOYA** |
| Fitting: | **ROTO / GU / MACO** |
| Handle: | **COLOUR-MATCHED TO FRAME** |
| Colour: | **VARNISH COLORS / RAL / F&B** |
| Silicone: | **WHITE / BLACK / CLEAR / GREY / BROWN** |
| Frame width: | **78 mm** |
| Heat Transfer Coefficient: | **0.85 W/(m²·K)** |

**www.q4sashwindows.com**